

🔍 Zoom



Move your mouse over image or click to enlarge

BEAMER™ 2000

HOME / PRODUCTS / ANCHOR POINTS

- Perfect for use overhead or at foot level
- Lightweight and durable
- Moves smoothly along beam
- Easy to install

Beam Size	Fits 3½" - 14" beams (up to ▾)
Worker Capacity Range	130-420 lbs.
Material	Aluminum, bronze manganese, zinc-plated steel, and stainless steel
Min. Breaking Strength	5,000 lbs.

Part #:
00101

Weight: 4 lb

[« Back](#)



Fixed Beam Anchor

Model: 2108406

Fixed beam anchor fits 2-1/2 in. to 12 in. wide I-beams (6.3-30.5cm) up to 1-1/2" thick (3.8cm).

[f Share](#) [in Share](#) [✉ Email](#) [🖨 Print](#)

Other Sizes / Lengths:

2108406: 2-1/2 in. to 12 in. wide (6.3-30.5cm) up to 1-1/2" thick (3.8cm) ▼

Please login or register to add products to your list:

[Log In](#) [Register](#)



PRODUCT HIGHLIGHTS

- Installs onto 2-1/2 in. to 12 in. wide I-beam flange (6.3-30.5cm) up to 1-1/2" thick (3.8cm).
- Attach in any orientation or direction
- Compact and lightweight design
- High strength steel and aluminum construction
- Extremely rugged and corrosion resistant
- Swiveling D-ring tie-off point
- Detent style attachment with built-in tightening handle

[Overview](#)

[Features](#)

[Specifications](#)

[Accessories](#)

Overview:

Our anchorage connectors are built from top quality materials guaranteeing high strength and durability to stand up to the toughest environments. Anchorage connectors are the unsung heroes of most fall protection systems, often overlooked but critical components because they securely attach your system to the anchorage. Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.



Glyder™ Sliding Beam Anchor

Model: 2110941

Sliding beam anchor fits 6 in. to 18 in. wide I-beams (15.3-45.7cm) up to 2-1/2" thick (6.3cm).

[f Share](#) [in Share](#) [✉ Email](#) [🖨 Print](#)

Other Sizes / Lengths:

2110941: 6 in. to 18 in. wide I-beams (15.3-45.7cm) up to 2-1/2" thick (6.3cm) ▾

Please login or register to add products to your list:
[Log In](#) [Register](#)



PRODUCT HIGHLIGHTS

- Installs onto 6 in. to 18 in. wide I-beam flange (15.3-45.7cm) up to 2-1/2" thick (6.3cm).
- Complete hands-free horizontal mobility
- Compact and lightweight design
- High strength steel and aluminum construction
- Extremely rugged and corrosion resistant
- Rotating D-ring tie-off point is fixed in center
- Replaceable wear pads eliminate metal-to-metal contact
- Easy to use detent pin adjustment
- Use Force2™ lanyard when tying off at feet

Overview

Features

Specifications

Accessories

Overview:

Our anchorage connectors are built from top quality materials guaranteeing high strength and durability to stand up to the toughest environments. Anchorage connectors are the unsung heroes of most fall protection systems, often overlooked but critical components because they securely attach your system to the anchorage. Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.



Glyder™ 2 Sliding Beam Anchor

Model: 2104700

Sliding beam anchor fits 3-1/2 in. to 14 in. wide I-beams (9-35.5cm) up to 1-1/4" thick (3.2cm).

[f Share](#) [in Share](#) [✉ Email](#) [🖨 Print](#)

Other Sizes / Lengths:

2104700: 3-1/2 in. to 14 in. wide I-beams (9-35.5cm) up to 1-1/4" thick (3.2cm) ▾

Please login or register to add products to your list:
[Log In](#) [Register](#)



PRODUCT HIGHLIGHTS

- Installs onto 3-1/2 in. to 14 in. wide I-beam flange (9-35.5cm) up to 1-1/4" thick (3.2cm)
- Complete hands-free horizontal mobility
- Compact and lightweight design
- High strength steel and aluminum construction
- Extremely rugged and corrosion resistant
- Rotating D-ring tie-off point is fixed in center
- Replaceable wear pads eliminate metal-to-metal contact
- Integrated dual ratcheting adjustment system
- Guarded locking mechanism
- Use Force2™ lanyard when tying off at feet

Overview

Features

Specifications

Accessories

Overview:

Our anchorage connectors are built from top quality materials guaranteeing high strength and durability to stand up to the toughest environments. Anchorage connectors are the unsung heroes of most fall protection systems, often overlooked but critical components because they securely attach your system to the anchorage. Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.



Trolley for I-Beam

Model: 2103143


Trolley fits 3 in. to 8 in. wide I-beams (7.6-20.3cm) up to 11/16" thick (1.7cm).

[f Share](#) [in Share](#) [✉ Email](#) [🖨 Print](#)

Please login or register to add products to your list:
[Log In](#) [Register](#)

PRODUCT HIGHLIGHTS

- Installs onto 3 in. to 8 in. wide I-beam flange (7.6-20.3cm) up to 11/16" thick (1.7cm).
- Complete hands-free horizontal mobility
- Ideal for use with self retracting lifeline
- Easy to use dual adjustment dials
- High strength steel construction
- Extremely rugged and corrosion resistant
- Rotating D-ring tie-off point is fixed in center
- Double-shielded wheel bearings
- Built-in guards protect wheels

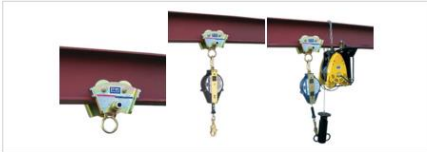

[Overview](#)

[Features](#)

[Specifications](#)

[Accessories](#)

Overview:

Our anchorage connectors are built from top quality materials guaranteeing high strength and durability to stand up to the toughest environments. Anchorage connectors are the unsung heroes of most fall protection systems, often overlooked but critical components because they securely attach your system to the anchorage. Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.



Web Tie-Off Adaptor

Model: 1003000

3 ft. (0.9m) web tie-off adaptor, pass-thru type.



Share



Share



Email



Print

Other Sizes / Lengths: ▾

Please login or register to add products to your list:

[Log In](#) [Register](#)



PRODUCT HIGHLIGHTS

- 3 ft. (0.9m) pass-thru type tie-off adaptor
- Durable polyester construction
- Abrasion resistant polyester wear pad
- High strength steel hardware
- Compact and lightweight design

Overview

Features

Specifications

Accessories

Overview:

Our anchorage connectors are built from top quality materials guaranteeing high strength and durability to stand up to the toughest environments. Anchorage connectors are the unsung heroes of most fall protection systems, often overlooked but critical components because they securely attach your system to the anchorage. Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.



Web Tie-Off Adaptor

Model: 1003006

6 ft. (1.8m) web tie-off adaptor, pass-thru type.



Share



Share



Email



Print

Other Sizes / Lengths:

Please login or register to add products to your list:

[Log In](#) [Register](#)



PRODUCT HIGHLIGHTS

- 6 ft. (1.8m) pass-thru type tie-off adaptor
- Durable polyester construction
- Abrasion resistant polyester wear pad
- High strength steel hardware
- Compact and lightweight design

Overview

Features

Specifications

Accessories

Overview:

Our anchorage connectors are built from top quality materials guaranteeing high strength and durability to stand up to the toughest environments. Anchorage connectors are the unsung heroes of most fall protection systems, often overlooked but critical components because they securely attach your system to the anchorage. Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.