

17D-1 Carabiner

Description

Miller twist lock carabiners with spring loaded keepers are used as anchorage connectors. The 17D-1 has a 1" gate opening, and is plated to resist rust and corrosion.

Materials

Carabiners: Zinc Dichromate Plated Forged Alloy Steel

Technical

Proof Tested: 3,600 lbs (16kN)

Min Tensile Strength: 5,000 lbs (22.2kN)

Max Working Load: 400 lbs (181kg)

Weight: 8.0 oz.


Certification

Meets or exceeds OSHA 1926.502, ANSI Z359-2007 and CSA Z259.12 requirements.

*ANSI Z359-2007 compliant for connectors which meet the 3,600lb gate requirements.

Warning!

Carabiner must be closed and locked prior to use. Inspect before each use. Improper use could result in serious injury or death.

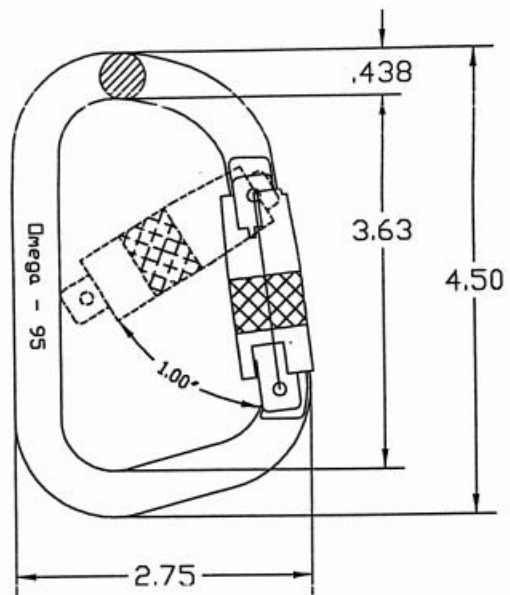



Saflok™ Carabiner

Model: 2000114

2-3/16 in. (55.5mm) gate opening steel carabiner with self closing/locking gate.

[f Share](#) [in Share](#) [✉ Email](#) [🖨 Print](#)

Please login or register to add products to your list:
[Log In](#) [Register](#)

PRODUCT HIGHLIGHTS

- 2-3/16 in. (55.5mm) gate opening steel carabiner
- Self closing and locking gate for added safety
- Highly corrosion resistant plated hardware
- High strength steel construction
- User friendly compact and lightweight design



Overview

Features

Specifications

Accessories

Overview:

Our anchorage connectors are built from top quality materials guaranteeing high strength and durability to stand up to the toughest environments. Anchorage connectors are the unsung heroes of most fall protection systems, often overlooked but critical components because they securely attach your system to the anchorage. Your choice of anchor depends on the type of work being done. Anchorages are sold by what they connect to (general/all purpose, steel, concrete, roof or specialty), whether they are fixed or mobile, and whether they are permanent or portable. They all must provide a secure point of attachment for a complete personal fall arrest system, and must be capable of supporting a load of 5,000 lbs. (22kN) or of meeting OSHA's criteria of a 2-to-1 safety factor.

Attachment Type Info	Hook
Install Type	Reusable
Capacity	310 lbs. (141 kg) ANSI / 420 lbs. (190 kg) OSHA
Brand	DBI-SALA®
Sub Brand	Saflok™
Velocity Ship	Yes
iSafe Equipped	No
Label	Stamped
Hook	Zinc Plated Steel
Model	2000114
Physical Dimensions	9.20x5.20x0.87 (in)
Physical Weight	1.90 lbs (0.9kg)
Product Styles	Fixed
Product Types	Carabiner
Standards	OSHA 1910.66, OSHA 1926.502, ANSI A10.32, ANSI Z359.1