

MAGNA LEVER CHAIN HOISTS


PRODUCTS

Lever Hoists

- Made in South Korea
- Load tested to 150% of rated capacity
- Meets ANSI/ASME standards
- ISO 9001 and TUV-CE Certified factory
- High quality alloy load chain meets all international safety standards
- Single-hand control of free-wheel function with load brake
- Weston Load Brake
- Parts and service available
- Rugged steel casing protects gears and brake mechanism
- 5, 10, 15 and 20 foot standard lifts.
Custom lifts available

NEW

- Optional overload indicator handle available. The overload indicator handle will alert the operator when the hoist is operating beyond the rated capacity. The handle grip will deflect 15 degrees when overloaded. The handle will reset when the hoist is operated in the down direction.

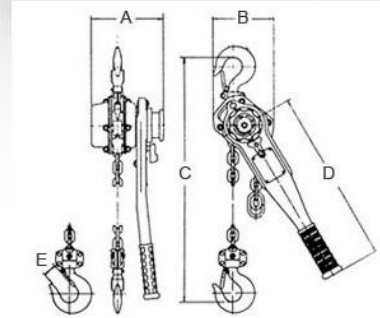

Lever Hoists Diagram

■ LH025 - Lever Hoist



Capacity (lbs): 550
 Standard Lift (ft): 5, 10, 15, 20
 Load Chain (mm): 4 x 12
 Net Weight (lbs): 5.2
 Minimum Load (lbs): 66
 Pull to Lift Capacity (lbs): 70
 A (in): 3.9
 B (in): 2.36
 C (in): 9.65
 D (in): 5.9
 E (in): 0.79

■ LH075 - Lever Hoist



Capacity (lbs): 1,650
 Standard Lift (ft): 5, 10, 15, 20
 Load Chain (mm): 6.3 x 19.1
 Net Weight (lbs): 17.6
 Minimum Load (lbs): 66
 Pull to Lift Capacity (lbs): 64
 A (in): 6.18
 B (in): 5.98
 C (in): 11.02
 D (in): 11.02
 E (in): 1.06

■ LH100 - Lever Hoist



Capacity (lbs): 2,200
 Standard Lift (ft): 5, 10, 15, 20
 Load Chain (mm): 6.3 x 19.1
 Net Weight (lbs): 17.6
 Minimum Load (lbs): 66
 Pull to Lift Capacity (lbs): 64
 A (in): 6.18
 B (in): 5.98
 C (in): 11.02
 D (in): 11.02
 E (in): 1.06

■ LH150 - Lever Hoist



Capacity (lbs): 3,300
 Standard Lift (ft): 5, 10, 15, 20
 Load Chain (mm): 7.1 x 21
 Net Weight (lbs): 24.3
 Minimum Load (lbs): 99
 Pull to Lift Capacity (lbs): 64
 A (in): 6.89
 B (in): 5.7
 C (in): 13
 D (in): 15.35
 E (in): 1.26

■ **LH300 - Lever Hoist**



Capacity (lbs): 6,600
Standard Lift (ft): 5, 10, 15, 20
Load Chain (mm): 9 x 27
Net Weight (lbs): 37.5
Minimum Load (lbs): 198
Pull to Lift Capacity (lbs): 77
A (in): 7.8
B (in): 7.48
C (in): 17.77
D (in): 15.35
E (in): 1.5

■ **LH600 - Lever Hoist**



Capacity (lbs): 13,200
Standard Lift (ft): 5, 10, 15, 20
Load Chain (mm): 9 x 27
Net Weight (lbs): 57.3
Minimum Load (lbs): 396
Pull to Lift Capacity (lbs): 77
A (in): 7.8
B (in): 9.25
C (in): 21.65
D (in): 15.35
E (in): 1.81

■ **LH750 - Lever Hoist**



Capacity (lbs): 16,500
Standard Lift (ft): 5, 10, 15, 20
Load Chain (mm): 9 x 27
Net Weight (lbs): 92
Minimum Load (lbs): 496
Pull to Lift Capacity (lbs): 77
A (in): 7.8
B (in): 12.6
C (in): 27.17
D (in): 15.35
E (in): 1.8

■ **LH900 - Lever Hoist**



Capacity (lbs): 19,800
Standard Lift (ft): 5, 10, 15, 20
Load Chain (mm): 9 x 27
Net Weight (lbs): 106
Minimum Load (lbs): 595
Pull to Lift Capacity (lbs): 77
A (in): 7.8
B (in): 12.6
C (in): 27.17
D (in): 15.35
E (in): 2.76