




GUNNEBO CLASSIC



Extra width (B) inside allows better fit on large Crane Hooks


Heat number identification allows full product traceability.

M

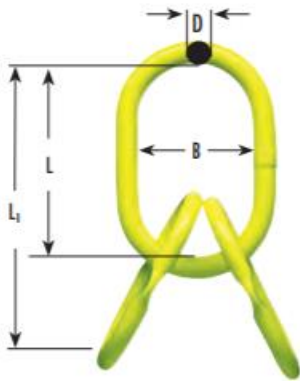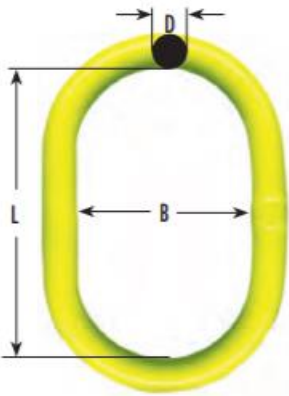

Engineered flat eliminates mix or match problems.

Heat number identification allows full product traceability.

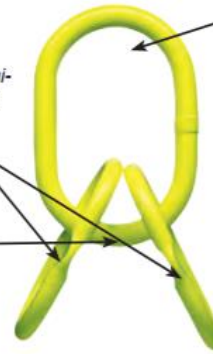


Extra wide for better fit on crane hooks.

MT

**OBLONG MASTER LINKS, GRADE 100 - TYPES M & MT
DESIGN FACTOR 5: FOR USE WITH WIRE ROPE**

Stock No.	Model	Trade Size In.	Grade	Working Load Limit *(Lbs)	L	B	D	Dimensions (Inches)				Weight Each (Lbs.)
								L1	l	b	d	
589614	M-6-10	3/8	100	3,300	3.9	2.4	0.43					0.44
589615	M-86-10	1/2	100	7,000	4.9	2.8	0.55					0.88
589616	M-108-10	5/8	100	11,400	5.5	3.1	0.67					1.8
589617	M-13-10	3/4	100	12,300	5.9	3.5	0.75					2.2
589618	M-1310-10	7/8	100	17,200	6.3	3.7	0.87					3.3
589619	M-1613-10	1	100	29,900	7.5	4.3	1.1					5.1
589620	M-19-10	1 1/4	100	35,200	7.9	4.7	1.2					7.7
589621	M-2016-10	1 3/8	100	45,300	9.4	5.5	1.3					11.7
589622	M-2220-10	1 1/2	100	68,000	9.8	5.9	1.6					16.1
589623	M-2622-10	1 5/8	100	70,400	9.8	5.9	1.7					17.2
589624	M-32-10	1 3/4	100	84,900	11.8	7.1	1.8					26.4
589625	M-3226-10	2	100	102,600	11.8	7.9	2.0					33.1
589626	M-3632-10	2 1/4	100	143,100	13.8	7.9	2.2					46.3
589627	M-4536-10	2 1/2	100	160,000	14.8	8.3	2.4					57.3
589628	M-90T-10	2 3/4	100	220,200	17.7	9.8	2.8					94.8
589629	M-125T-10	3 1/4	100	275,300	17.7	10.2	3.1					125.6
589630	MT-6-10**	3/4	100	11,000	5.9	3.5	0.75	10.6	4.7	2.8	0.55	4.0
589631	MT-8-10 **	7/8	100	17,600	6.3	3.7	0.87	11.8	5.5	3.1	0.67	6.6
589632	MT-9-10 **	1	100	21,300	7.5	4.3	1.1	13.4	5.9	3.5	0.75	9.5
589633	MT-10-10 **	1 1/4	100	35,200	7.9	4.7	1.2	14.2	6.3	3.7	0.87	14.3
589634	MT-13-10 **	1 5/8	100	57,200	9.8	5.9	1.6	17.3	7.5	4.3	1.1	30.0
589635	MT-16-10 **	2	100	77,000	11.8	7.9	2.0	19.7	7.9	4.7	1.3	50.7
589636	MT-20-10 **	2 1/4	100	110,100	11.8	7.9	2.2	21.7	9.8	5.9	1.6	69.4
589637	MT-22-10	2 1/2	100	165,100	13.8	7.9	2.4	24.0	10.2	5.5	1.8	101.4
589638	MT-26-10	2 3/4	100	220,200	17.7	9.8	2.8	28.7	11.0	6.3	2.0	156.5
589639	MT-32-10	3 1/4	100	275,300	17.7	10.2	3.1	29.5	11.0	6.3	2.2	200.6

G100 ALLOY COUPLING LINKS



ALLOY COUPLING LINKS - G

Stock No.	Model	Chain Size In.	Grade	Working Load Limit *(Lbs)	L	Dimensions (Inches)			Weight Each (Lbs.)
						B	G	E	
589672	G-7-10	9/32"	100	4,300	2.2	0.71	0.35	0.87	0.44
589674	G-8-10	5/16"	100	5,700	2.2	0.71	0.35	0.87	0.44
589675	G-10-10	3/8"	100	8,800	2.7	1.0	0.47	1.0	0.66
589676	G-13-10	1/2"	100	15,000	3.5	1.1	0.59	1.3	1.5
545104	G-16-8	5/8"	80	18,100	4.1	1.4	0.75	1.6	2.6
589677	G-16-10	5/8"	100	22,600	4.1	1.4	0.75	1.6	3.1
545105	G-18/20-8	3/4"	80	28,300	4.9	1.7	0.87	1.9	4.4
589679	G-20-10	3/4"	100	35,300	4.9	1.7	1.0	1.9	5.7
545106	G-22-8	7/8"	80	34,200	6.0	2.0	0.94	2.3	6.6
589680	G-22-10	7/8"	100	42,700	6.0	2.0	1.0	2.3	7.7
545107	G-26-8	1"	80	47,700	6.3	2.3	1.1	2.4	10.1
589681	G-26-10	1"	100	59,700	6.3	2.3	1.3	2.4	12.6
545109**	G-32-8	1-1/4"	80	72,300	7.9	2.8	1.5	3.1	19.0

* Design Factor 4:1 Proof tested and certified.